

■ Bag filter Rectangular Pulse Valve

Order Code

DMF	Z	XX	S	□	□
Bag Filter	Right angle	Diameter	Double Diaphragm	Temperature Grade	A:AC220V
				1:-15~65°C	B:DC24V
				2:-25~180°C	X:Explosion-Proof



DMF-Z-20



DMF-Z-25



DMF-Z-40S




DMF-Z-50S



DMF-Z-62S

Overall Dimension Chart

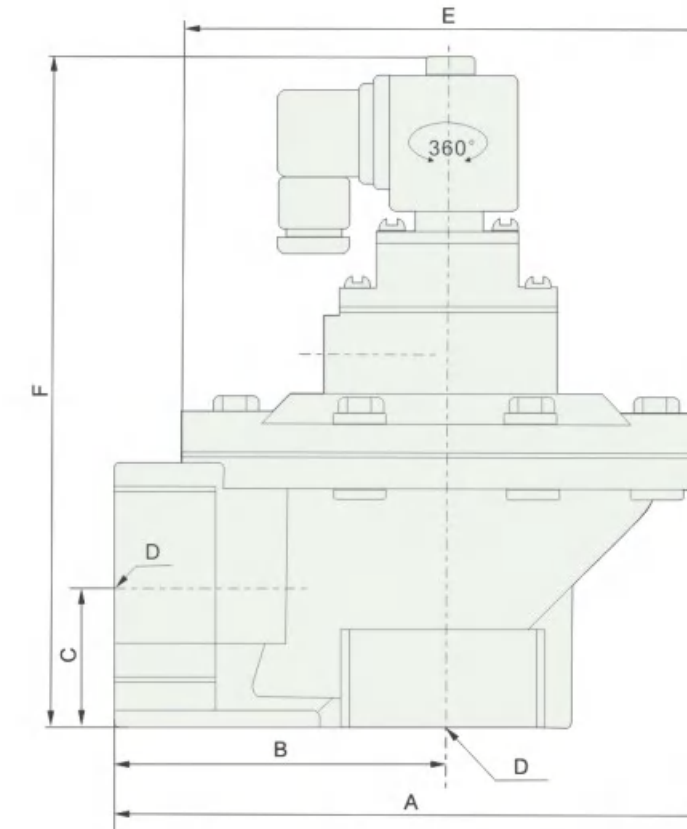

Valve Selection list

Model	DMF-Z-20	DMF-Z-25	DMF-Z-40S	DMF-Z-50S	DMF-Z-62S
Pressure	0.3~0.7Mpa				
Temperature	-15~65°C				
Relative Humidity	≤85%				
Medium	Air				
Voltage	AC110V/AC220V/DC24V				
Diaphragm Life	One million				
Diameter(mm)	20	25	40	50	62
Connection Thread	3/4"	1"	1 1/2"	2"	2 1/2"
KV/CV	17.55/20.48	26.16/30.53	45.82/53.47	62.09/72.46	136.58/159.39
Blowing Area(m ²)	3.5~6	8~10	12~16	18~28	27~38

Dimension Sheet (mm)

Model	Orifice	A	B	C	D	E	F
DMF-Z-20	20	88	48	20	G3/4"	φ80	128
DMF-Z-25	25	108	60	23	G1"	φ96	136
DMF-Z-40S	40	131	75	32	G1 1/2"	φ112	184
DMF-Z-50S	50	180	100	43	G2"	φ160	206
DMF-Z-62S	62	204	110	49	G2 1/2"	φ188	226